


CF Type

The Ruey-Shing signature lift-up chest freezer is the #1 choice for retail and domestic cold storage. Designed with minimalistic look and easy-to-grab handle, the CF series is a cost efficient choice for both business and domestic uses.



Product Feature:

- Casters
- Internal lighting
- Lock and key
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- CFC free refrigerant

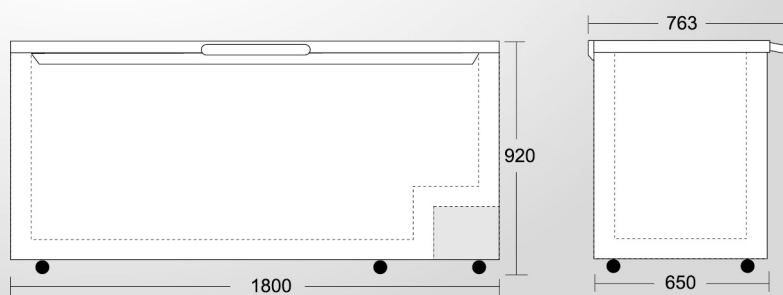

UNIT : m/m

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply	Accessories
RS-CF250	207	-16~ -20°C	750 x 650 x 920	1/5	R134a	220 / 110V 50 / 60Hz	1 Basket
RS-CF330	301	-16~-20°C	1000 x 650 x 920	1/4	R134a	220 / 110V 50 / 60Hz	1 Basket
RS-CF430	414	-16~ -20°C	1300 x 650 x 920	1/4	R134a	220 / 110V 50 / 60Hz	1 Basket
RS-CF500	489	-16~ -20°C	1500 x 650 x 920	1/4	R134a	220 / 110V 50 / 60Hz	1 Basket
RS-CF600	602	-16~ -20°C	1800 x 650 x 920	1/3	R134a	220 / 110V 50 / 60Hz	1 Basket


DF Type

A high capacity, high performance chest freezer featuring glass sliding doors and premium aluminum frame. Glass cover and salad bar add-on also available on request.



Product Feature:


- Casters
- Aluminum door frame
- Low-E tempered glass sliding doors
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- CFC free refrigerant

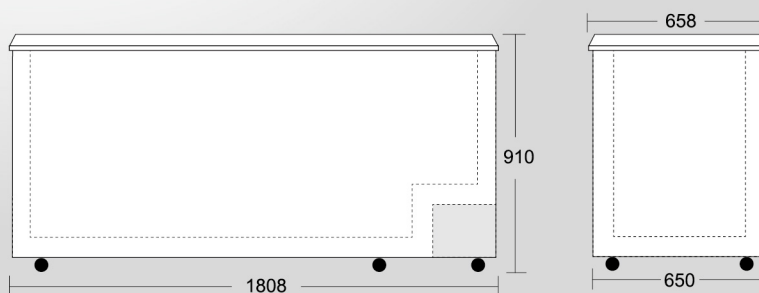

UNIT : m/m

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-DF250	207	-16~ -20°C	758 x 658 x 910	1/4	R134a	220 / 110V 50 / 60Hz
RS-DF330	301	-16~-20°C	1008 x 658 x 910	1/4	R134a	220 / 110V 50 / 60Hz
RS-DF430	414	-16~ -20°C	1308 x 658 x 910	1/3	R134a	220 / 110V 50 / 60Hz
RS-DF500	489	-16~ -20°C	1508 x 658 x 910	3/8	R134a	220 / 110V 50 / 60Hz
RS-DF600	602	-16~ -20°C	1808 x 658 x 910	1/2	R134a	220 / 110V 50 / 60Hz

CF200 & DF200 Type

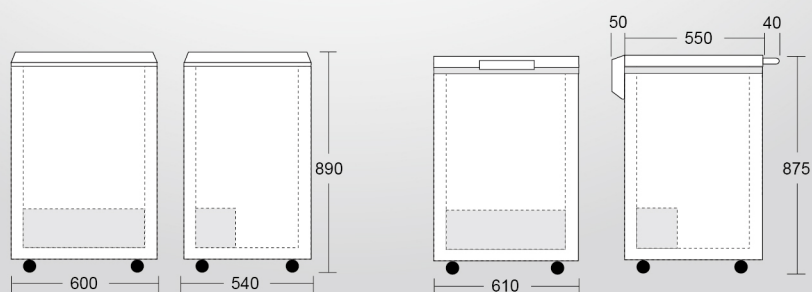

UNIT : m/m


Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-CF200	125	-16~ -20℃	600 x 540 x 890	1/8	R134a	220 / 110V 50 / 60Hz
RS-DF200	125	-16~-20℃	610 x 550 x 875	1/5	R134a	220 / 110V 50 / 60Hz

Installed with upgraded LBP compressor, this series blends outstanding performance and ease of use to quickly chill products to the required temperature.



Product Feature:

- Casters
- Lock and key
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- Upgraded compressor capacity
- CFC free refrigerant

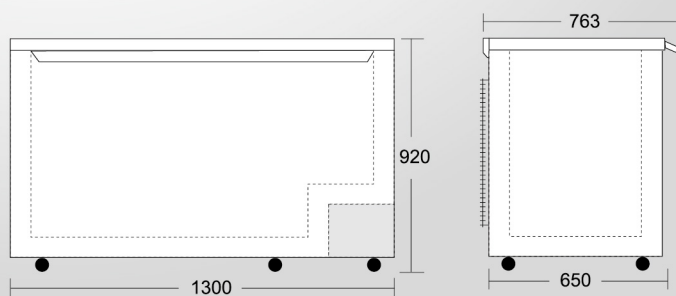

UNIT : m/m

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-CF250LT	207	-40~ -45°C	750 x 650 x 920	5/8	R404A	220V 50 / 60Hz
RS-CF330LT	301	-40~ -45°C	1000 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF430LT	414	-40~ -45°C	1300 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF500LT	489	-40~ -45°C	1500 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF600LT	602	-40~ -45°C	1800 x 650 x 920	3/4	R404A	220V 50 / 60Hz

LT-100<-100S Type




Installed with upgraded LBP compressor and enhanced insulator, this top of the range series is made to satisfy extreme storage temperature requirements.



Product Feature:

- Casters
- Lock and key
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- Upgraded compressor capacity
- 100mm thick polyurethane foam insulation
- CFC free refrigerant

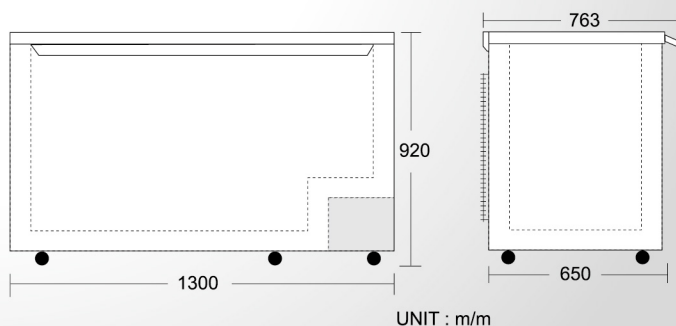

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-CF250LT-100	136	-45~ -50°C	750 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF330LT-100	227	-45~ -50°C	1000 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF430LT-100	320	-45~ -50°C	1300 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF500LT-100	380	-45~ -50°C	1500 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF600LT-100	485	-45~ -50°C	1800 x 650 x 920	1	R404A	220V 50 / 60Hz
RS-CF250LT-100S	136	-55~ -60°C	750 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF330LT-100S	227	-55~ -60°C	1000 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF430LT-100S	320	-55~ -60°C	1300 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF500LT-100S	380	-55~ -60°C	1500 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF600LT-100S	485	-55~ -60°C	1800 x 650 x 920	1	R404A	220V 50 / 60Hz